


▶ Product Appearance




▶ Product Size



Net Weight: 7.1±0.5kg

▶ Packaging Size



Gross Weight: 8.1±0.5kg


▶ Features

- A grade brand new prismatic LiFePO₄ cells
- ≥4000 cycles @80% DOD(25°C, 0.5C)
- Over charge, over discharge, over temperature, low Temperature, Over current and short circuit protection
- Easy installation and maintenance free
- LCD display screen to monitor cell SOC, voltage, temperature and alarm status
- Cell balance function
- Metal Case, excellent heat dissipation, more safety
- Certificate: UN38.3, MSDS
- Max.4 battery packs can be connected in series


▶ Technical Specifications

Model	LFP0.64KWH12.8V-P20L2
Battery Type	LiFePO ₄
Nominal Voltage (V)	12.8
Nominal Capacity (AH)	50
Energy (WH)	640
Pack Mode	4S1P
Continuous Discharge Current (A)	25
Charge Cut-off Voltage (V)	14.4
Discharge Cut-off Voltage (V)	10.4
Max.Charge Current (A)	50
Max.Discharge Current (A)	50
Peak Discharge Current (A)	60@10S
Recommend Discharge Current (A)	25
Recommend Discharge Depth (%)	80
Cycle Life	≥4000 cycles (25°C, 0.5C) 80% DOD
Communication	—
Display	LCD
Charge&Discharge Temperature (°C)	Charge: 0°C~+55°C / Discharge: -20°C~+60°C
Optimal Storage Temperature (°C)	5°C ~ +35°C
Recommend Storage Humidity	20%~80%
Terminal	M8
Dimensions (L*W*H) (mm)	205*160*160
Weight (Kg)	7.1±0.5
Certificate	UN38.3 , MSDS
IP Class	IP20


Different Rate Discharge Curve@25°C

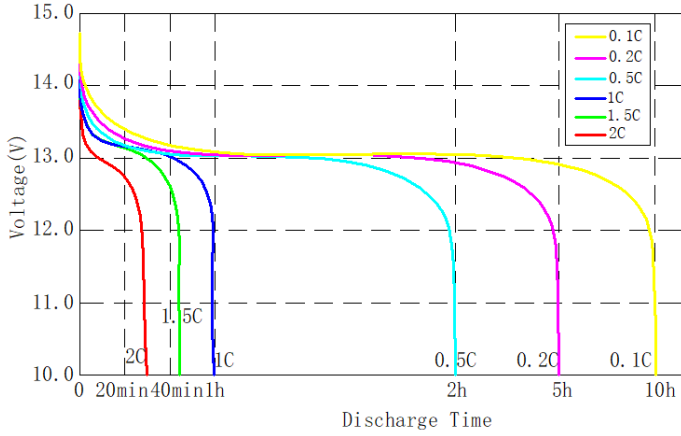


Different Temperature Discharge Curve@0.5C

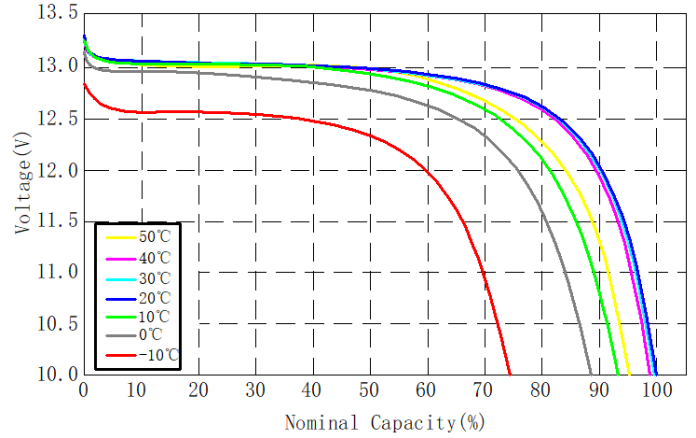


State of Charge Curve@0.5C 25°C

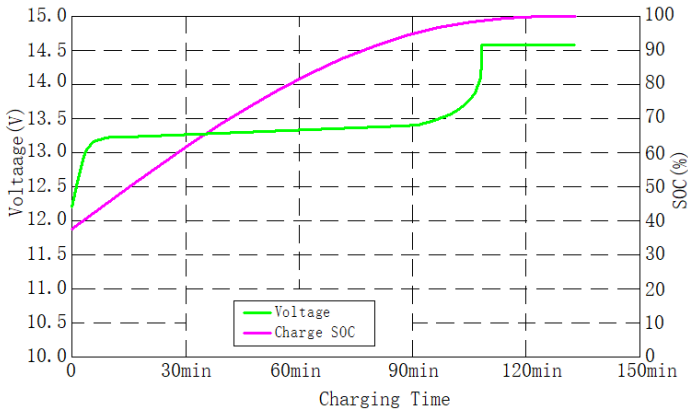

Charging Characteristics @0.5C 25°C

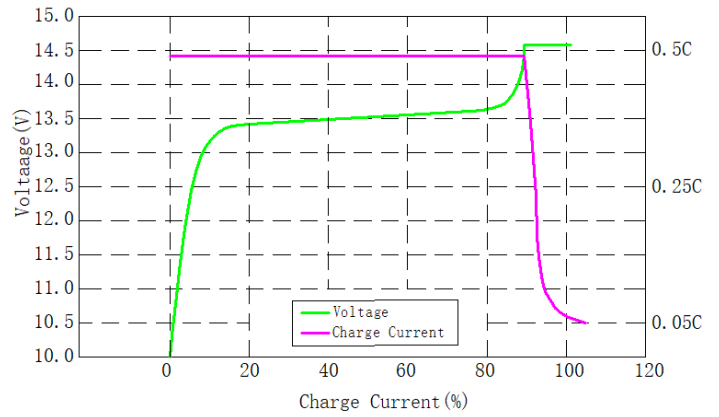

Different DOD Discharge Cycle Life Curve@0.5C 25°C

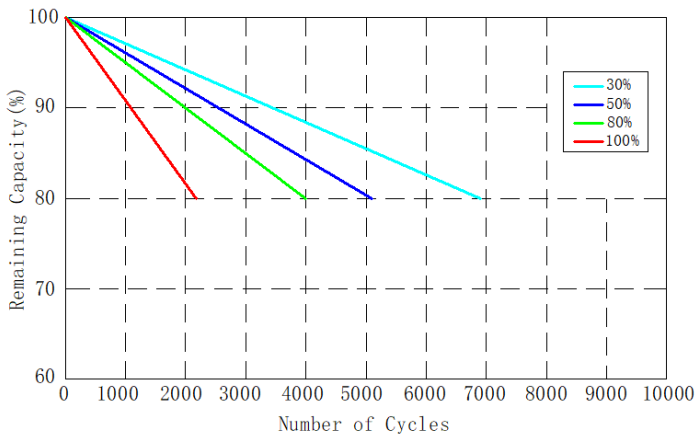

Different Temperature Self Discharge Curve

